



FELANGI



Felangi

PRODUCT CATALOG

2022 | SUMMER

We strive to save our clients energy while illuminating indoor and outdoor spaces with quality products manufactured and tested against the highest standards. Each product is created with our clients in mind; therefore, we pride ourselves in giving affordable pricing, without sacrificing quality and performance.

Residential Lighting

- General Purpose

LED A Lamp (Arbitrary)	Page 2
LED BR Lamp (Bulged Reflector)	Page 6
LED PAR Lamp (Parabolic Aluminized Reflector)	Page 8
LED MR Lamp (Multi-Faceted Reflector)	Page 12

- Decorative

LED Filament Lamp	Page 13
LED Flame Lamp	Page 17

- Smart Lighting

LED Smart Lamp	Page 18
LED Smart Downlight	Page 18

Commercial Lighting

- Commercial

LED PL Lamp	Page 20
LED Linear	Page 21
LED Corn Bulb	Page 22
LED Light Engine - MPLR	Page 23
LED Downlight	Page 24
LED Troffer	Page 27
LED Flat Panel	Page 28
LED Linear Fixture	Page 30
LED Suspended Up & Down Light	Page 31
LED Canopy Light	Page 32
LED High Bay Light	Page 33
LED Wall Pack	Page 34
Commercial Product Accessory	Page 35

Residential Decorative Fixtures

- General Purpose & Decorative


LED Flame Lantern & Hanging Light	Page 37
LED Outdoor Wall Light	Page 38
LED Security Light	Page 40
LED Ceiling Light	Page 41
LED Vanity Light	Page 43
LED Wall Sconce	Page 44
LED Torchiere Lamp	Page 45





Residential Lighting

Our residential products are carefully designed to help you obtain better energy savings and to make you feel at home. From advanced wi-fi connected devices to everyday-use lighting essentials Felangi counts with a vast variety of LED products suitable to your preference. Set "the scene" with features such as dimmability, 90+ CRI, selectable CCTs, damp/dry/wet rated locations among others. Optimize energy efficiency with selectable wattages and high luminous efficacy. Felangi is committed to safety and efficiency. Therefore, we work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our residential ranked products are suitable for use in houses, villas, apartments, hotels, and living spaces. To learn more, we encourage you to continue exploring what Felangi has waiting for you.

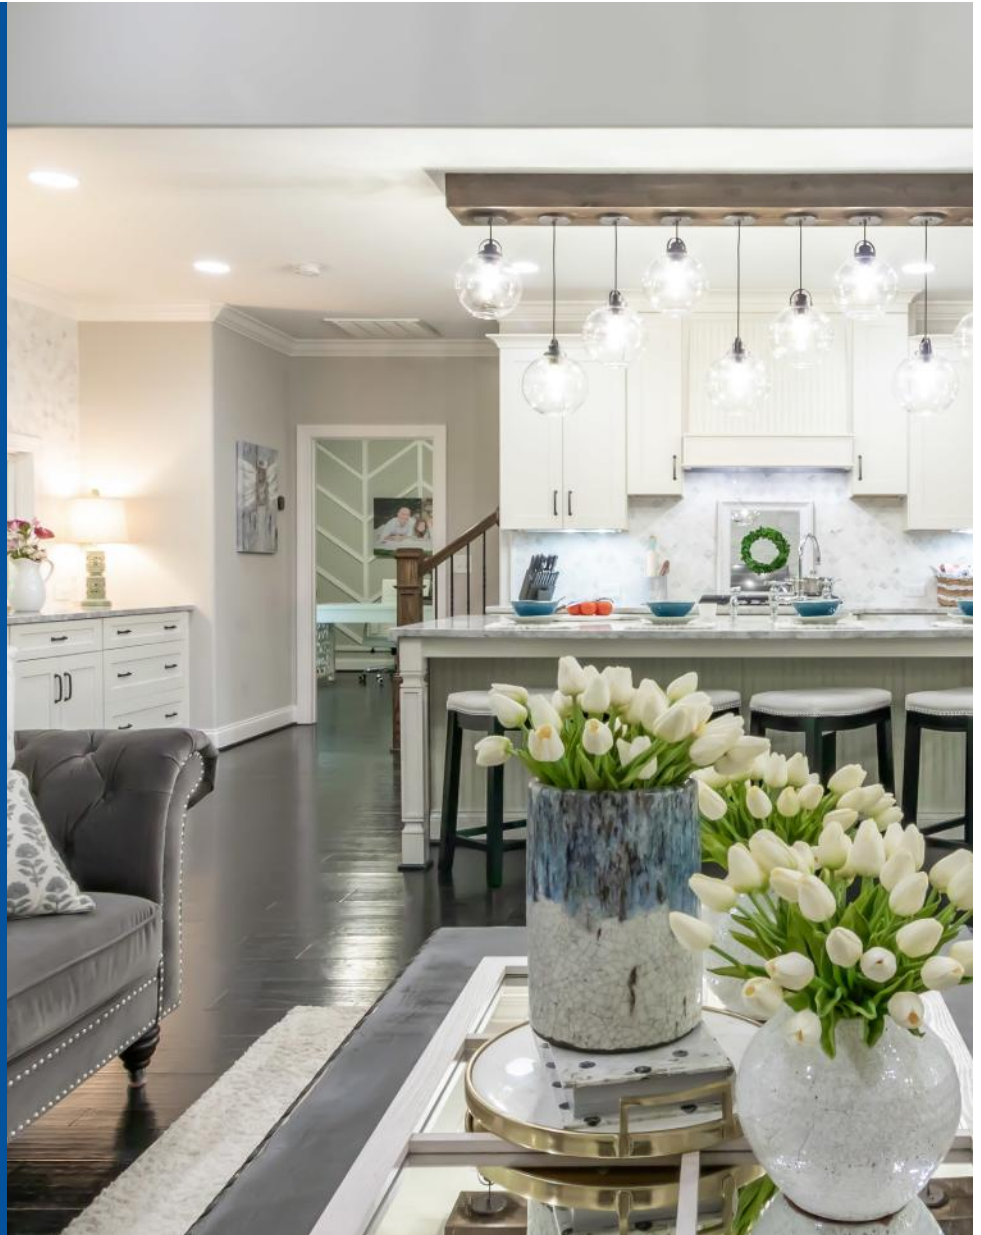

General Purpose LED A Lamp



Felangi's most versatile series, the "A" Arbitrary LED Series offers a variety of energy-efficient Lamps in multiple shapes and color temperatures. Built to mimic the appearance, but save over 80% more energy than standard incandescent light Lamps, A-shape LED Lamps are a lighting staple with residential spaces. Designed to evenly distribute light, these LED Lamps pair perfectly with table lamps, ceiling fans, wall sconces and more.

A19 Class

EVERYDAY LED LINE Signature LED Products

FL19-6000e-4 / FL19-6020e-4 / FL19-6040e-4 / FL19-6050e-4
 FL19-8W2000eG-2 / FL19-8W2020eG-2 / FL19-8W2040eG-2 / FL19-8W2050eG-2
 FL19-11W2000eG-2 / FL19-11W2020eG-2 / FL19-11W2040eG-2 / FL19-11W2050eG-2
 FL19-14W1100eGV / FL19-14W1120eGV / FL19-14W1140eGV / FL19-14W1150eGV
 FL19-15W2000e / FL19-15W2020e / FL19-15W2040e / FL19-15W2050e

3 WAY LED LINE Signature LED Products

FL19-12W2100et / FL19-12W2120et / FL19-12W2140et / FL19-12W2150et

ECON LED LINE Economic LED Products

FL19-6100-4 / FL19-6120-4 / FL19-6140-4 / FL19-6150-4

E-LITE LED LINE Premium LED Products

FL19-5000cec-2 / FL19-5001cec-2 / FL19-5002cec-2
 FL19-5W5021cec-2 / FL19-5041cec-2 / FL19-5051cec-2
 FL19-9W5040cec-2 / FL19-9W5050cec-2
 FL19-12W5042cec-2 / FL19-12W5052cec-2
 FL19-9W5000CG / FL19-9W5020CG / FL19-9W5040CG / FL19-9W5050CG
 FL19-12W5000CG / FL19-12W5020CG / FL19-12W5040CG / FL19-12W5050CG

SMART LED LINE Advanced

FL-A1000 / FL-A2001cec

A21 Class

EVERYDAY LED LINE Signature LED Products

FL21-22W1000eh / FL21-22W1020eh
 FL21-22W1040eh / FL21-22W1050eh

E-LITE LED LINE Premium LED Products

FL21-4000cec-2
 FL21-17W5000cec / FL21-17W5040cec / FL21-17W5050cec
 FL21-17W5000CG / FL21-17W5020CG / FL21-17W5040CG / FL21-17W5050CG

A19 Class

Residential Lighting | General Purpose



FL19-6000e-4
FL19-6020e-4
FL19-6040e-4
FL19-6050e-4

FL19-8W2000eG-2
FL19-8W2020eG-2
FL19-8W2040eG-2
FL19-8W2050eG-2

FL19-11W2000eG-2
FL19-11W2020eG-2
FL19-11W2040eG-2
FL19-11W2050eG-2

FL19-14W1100eGV
FL19-14W1120eGV
FL19-14W1140eGV
FL19-14W1150eGV

FL19-15W2000e
FL19-15W2020e
FL19-15W2040e
FL19-15W2050e

FL19-12W2100et
FL19-12W2120et
FL19-12W2140et
FL19-12W2150et

FL19-6100-4
FL19-6120-4
FL19-6140-4
FL19-6150-4

Damp Rated High Output Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.	
EVERYDAY LED LINE Signature Products												* Frosted Plastic Lens							
FL19-6000e-4 (3000K), FL19-6020e-4 (2700K), FL19-6040e-4 (4000K), FL19-6050e-4 (5000K)																			
9 W	60 W	120 V	800 lm	220°	Omni-Directional	80	88 lm/W	0.7	0.11 A	E26	25,000 Hrs.	2 3" x 4 2"	Yes	Yes	No	No	Yes	4	
FL19-8W2000eG-2 (3000K), FL19-8W2020eG-2 (2700K), FL19-8W2040eG-2 (4000K), FL19-8W2050eG-2 (5000K)																			
8 W	60 W	120 V	800 lm	220°	Omni-Directional	80	100 lm/W	0.7	0.1 A	GU24	25,000 Hrs.	2 3" x 4 2"	Yes	Yes	No	No	Yes	2	
FL19-11W2000eG-2 (3000K), FL19-11W2020eG-2 (2700K), FL19-11W2040eG-2 (4000K), FL19-11W2050eG-2 (5000K)																			
11 W	75 W	120 V	1100 lm	220°	Omni-Directional	80	100 lm/W	0.7	0.13 A	GU24	25,000 Hrs.	2 3" x 4 2"	Yes	Yes	No	No	Yes	2	
FL19-14W1100eGV (3000K), FL19-14W1120eGV (2700K), FL19-14W1140eGV (4000K), FL19-14W1150eGV (5000K)																			
14 W	100 W	120-277 V	1600 lm	210°	Omni-Directional	80	114 lm/W	0.7	N/A	GU24	20,000 Hrs.	2 3" x 4 2"	Yes	Yes	No	No	No	1	
FL19-15W2000e (3000K), FL19-15W2020e (2700K), FL19-15W2040e (4000K), FL19-15W2050e (5000K)																			
15 W	100 W	120 V	1600 lm	210°	Omni-Directional	80	106 lm/W	0.7	0.17 A	E26	25,000 Hrs.	2 3" x 4.6"	Yes	Yes	No	No	Yes	1	
3way LED LINE Signature Products												* Frosted Plastic Lens							
FL19-12W2100et (3000K), FL19-12W2120et (2700K), FL19-12W2140et (4000K), FL19-12W2150et (5000K)																			
4 W	40 W		500 lm																
8 W	60 W	120 V	1000 lm	210°	Omni-Directional	80	125 lm/W	0.7	N/A	E26	25,000 Hrs.	2 3" x 4 5"	Yes	Yes	No	No	No	1	
12 W	100 W		1500 lm																
ECON LED LINE Economic Products												* Frosted Plastic Lens							
FL19-6100-4 (3000K), FL19-6120-4 (2700K), FL19-6140-4 (4000K), FL19-6150-4 (5000K)																			
9 W	60 W	120 V	800 lm	220°	Omni-Directional	80	88 lm/W	0.5	0.15 A	E26	10,000 Hrs.	2 3" x 4 2"	Yes	No	No	No	No	4	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

A19 Class

Residential Lighting | General Purpose



FL19-5001cec-2
FL19-5W5021cec-2
FL19-5W5041cec-2
FL19-5W5051cec-2

FL19-5000cec-2
FL19-9W5040cec-2
FL19-9W5050cec-2

FL19-5002cec-2
FL19-12W5042cec-2
FL19-12W5052cec-2

FL19-9W5000CG
FL19-9W5020CG
FL19-9W5040CG
FL19-9W5050CG

FL19-12W5000CG
FL19-12W5020CG
FL19-12W5040CG
FL19-12W5050CG

FL-A1000

FL-A2001cec

New Item Damp Rated True Color Fully Enclosed Suitable Tunable White CCT Multicolor CCT + RGB

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.		
E-LITE LED LINE Premium Products													* Frosted Plastic Lens							
FL19-5001cec-2(3000K), FL19-5W5021cec-2(2700K), FL19-5W5041cec-2(4000K)																				
5 W	40 W	120 V	450 lm	200°	Omni-Directional	90+	90 lm/W	0.9	0.04 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	Yes	Yes	2		
FL19-5W5051cec-2(5000K)																				
5 W	40 W	120 V	450 lm	200°	Omni-Directional	90+	90 lm/W	0.9	0.04 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	No	Yes	2		
FL19-5000cec-2(3000K), FL19-9W5040cec-2(4000K)																				
9 W	60 W	120 V	810lm	200°	Omni-Directional	90+	90 lm/W	0.9	0.08 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	Yes	Yes	2		
FL19-9W5050cec-2(5000K)																				
9 W	60 W	120 V	810lm	200°	Omni-Directional	90+	90 lm/W	0.9	0.08 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	No	Yes	2		
FL19-5002cec-2(3000K), FL19-12W5042cec-2(4000K)																				
12 W	75 W	120 V	1100 lm	200°	Omni-Directional	90+	91 lm/W	0.9	0.1 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	Yes	Yes	2		
FL19-12W5052cec-2(5000K)																				
12 W	75 W	120 V	1100 lm	200°	Omni-Directional	90+	92 lm/W	0.9	0.1 A	E26	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	No	Yes	2		
NEW FL19-9W5020CG(2700K), FL19-9W5000CG(3000K), FL19-9W5040CG(4000K)																				
9 W	60 W	120 V	810lm	220°	Omni-Directional	90+	90 lm/W	0.9	0.09 A	GU24	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	Yes	Yes	1		
NEW FL19-9W5050CG(5000K)																				
9 W	60 W	120 V	810lm	220°	Omni-Directional	90+	90 lm/W	0.9	0.09 A	GU24	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	No	Yes	1		
NEW FL19-12W5020CG(2700K), FL19-12W5000CG(3000K), FL19-12W5040CG(4000K)																				
12 W	75 W	120 V	1100 lm	220°	Omni-Directional	90+	91 lm/W	0.9	0.11 A	GU24	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	Yes	Yes	1		
NEW FL19-12W5050CG(5000K)																				
12 W	75 W	120 V	1100 lm	220°	Omni-Directional	90+	91 lm/W	0.9	0.11 A	GU24	25,000 Hrs.	2.3" x 4.2"	Yes	Yes	Yes	No	Yes	1		
SMART Wi-Fi Enabled Products													* Frosted Plastic Lens							
FL-A1000 (2000K-5000K)																				
10 W	60 W	120 V	800 lm	205°	Omni-Directional	80+	80 lm/W	0.5	140 A	E26	15,000 Hrs.	2.4" x 4.3"	Yes	No	No	No	Yes	1		
FL-A2001cec (2700K-5000K)																				

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

A21 Class

Residential Lighting | General Purpose



FL21-22W1000eh
FL21-22W1020eh
FL21-22W1040eh
FL21-22W1050eh

FL21-4000cec-2
FL21-17W5000cec
FL21-17W5040cec
FL21-17W5050cec

FL21-17W5000CG
FL21-17W5020CG
FL21-17W5040CG
FL21-17W5050CG

New Item Damp Rated High Output True Color Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.			
EVERYDAY LED LINE Signature Products													* Frosted Plastic Lens								
FL21-22W1000eh (3000K), FL21-22W1020eh (2700K), FL21-22W1040eh (4000K), FL21-22W1050eh (5000K)																					
22 W	150 W	120 V	2550 lm	210°	Omni-Directional	80	115 lm/W	0.7	0.2 A	E26	25,000 Hrs.	2 8" x 5.4"	Yes	Yes	No	No	Yes	1			
E-LITE LED LINE Premium Products													* Frosted Plastic Lens								
FL21-4000cec-2 (3000K)																					
17 W	100 W	120 V	1600 lm	313°	Omni-Directional	90+	94 lm/W	0.9	0.01 A	E26	25,000 Hrs.	2 8" x 5.3"	Yes	Yes	Yes	Yes	Yes	2			
FL21-17W5000cec (3000K), FL21-17W5040cec (4000K)																					
17 W	100 W	120 V	1600 lm	210°	Omni-Directional	90+	94 lm/W	0.9	0.15 A	E26	25,000 Hrs.	2 8" x 5.4"	Yes	Yes	Yes	Yes	Yes	1			
FL21-17W5050cec (5000K)																					
17 W	100 W	120 V	1600 lm	210°	Omni-Directional	90+	94 lm/W	0.9	0.15 A	E26	25,000 Hrs.	2 8" x 5.4"	Yes	Yes	Yes	No	Yes	1			
FL21-17W5020CG (2700K), FL21-17W5000CG (3000K), FL21-17W5040CG (4000K)																					
17 W	100 W	120 V	1600 lm	210°	Omni-Directional	90+	94 lm/W	0.9	0.15 A	GU24	25,000 Hrs.	2 8" x 5.4"	Yes	Yes	Yes	Yes	Yes	1			
FL21-17W5050CG (5000K)																					
17 W	100 W	120 V	1600 lm	210°	Omni-Directional	90+	94 lm/W	0.9	0.15 A	GU24	25,000 Hrs.	2 8" x 5.4"	Yes	Yes	Yes	No	Yes	1			

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

General Purpose LED BR Lamp



Designed for superior ambient lighting, Felangi's "BR" Bulged Reflector LED Lamps are built with internal reflectors to guarantee evenly dispersed bright light. Durable and dependable, these directional light Lamps are used in flood light fixtures, recessed cans, and track lighting fixtures to emphasize and illuminate artwork, architecture, or favored décor.

BR20 Class

■ **E-LITE LED LINE** Premium LED Products
FL20-4020cec-2 / FL20-5000cec-2

BR30 Class

■ **EVERYDAY LED LINE** Signature LED Products
FL30-11W3000e / FL30-11W3020e
FL30-11W3040e / FL30-11W3050e

■ **E-LITE LED LINE** Premium LED Products
FL30-5000cec
FL30-9W5040cec

■ **SMART LED LINE** Advanced
FL-B1002 / FL-B1003

BR40 Class

■ **EVERYDAY LED LINE** Signature LED Products
FL40-17W3000e / FL40-17W3020e
FL40-17W3040e / FL40-17W4050e

■ **E-LITE LED LINE** Premium LED Products
FL40-11W5040cec

BR Class

Residential Lighting | General Purpose



Damp Rated True Color Tunable White CCT Multicolor CCT + RGB

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.	
EVERYDAY LED LINE Signature Products												* Frosted Plastic Lens							
FL30-11W3000e (3000K), FL30-11W3020e (2700K), FL30-11W3040e (4000K), FL30-11W3050e (5000K)																			
11 W	65 W	120 V	850 lm	110°	Flood	80	77 lm/W	0.7	0.13 A	E26	25,000 Hrs.	3.7 x 5.1"	Yes	Yes	No	No	Yes	1	
FL40-17W3000e (3000K), FL40-17W3020e (2700K), FL40-17W3040e (4000K), FL40-17W3050e (5000K)																			
17 W	100 W	120 V	1400 lm	110°	Flood	80	82 lm/W	0.7	0.185 A	E26	25,000 Hrs.	4.7 x 6.2"	Yes	Yes	No	No	Yes	1	
E-LITE LED LINE Premium Products												* Frosted Plastic Lens							
FL20-4020cec-2 (2700K), FL20-5000cec-2 (3000K)																			
5.5 W	50 W	120 V	525 lm	120°	Flood	90+	95 lm/W	0.9	0.05 A	E26	25,000 Hrs.	2.5 x 3.8"	Yes	Yes	Yes	Yes	Yes	2	
FL30-5000cec (3000K), FL30-9W5040cec (4000K)																			
9 W	65 W	120 V	810 lm	110°	Flood	90+	88 lm/W	0.9	0.09 A	E26	25,000 Hrs.	3.7 x 5"	Yes	Yes	Yes	Yes	Yes	1	
FL40-11W5040cec (4000K)																			
11 W	80 W	120 V	1000 lm	110°	Flood	90+	91 lm/W	0.9	0.1 A	E26	25,000 Hrs.	4.7 x 6.2"	Yes	Yes	Yes	Yes	Yes	1	
SMART Wi-Fi Enabled Products												* Frosted Plastic Lens							
FL-B1002 (2000K-5000K)																			
10 W	60 W	120 V	650 lm	110°	Flood	80+	65 lm/W	0.5	140 A	E26	15,000 Hrs.	3.7 x 5"	Yes	No	No	No	Yes	1	
FL-B1003 (2000K-5000K)																			
10 W	60 W	120 V	650 lm	110°	Flood	80+	65 lm/W	0.5	140 A	E26	15,000 Hrs.	3.7 x 5"	Yes	No	No	No	Yes	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

General Purpose LED PAR Lamp



Offered in a variety of sizes and color temperatures, Felangi's "PAR" Parabolic Aluminized Reflector LED Lamps provide wide and bright directional light. Designed with an internal parabolic mirror for a focused beam angle, these LED spotlights are ideal for accent lighting within theatres, museums, or retail stores. Easy to install and built to last, these LED Lamps reduce maintenance hassle and energy consumption

PAR16 Class

EVERYDAY LED LINE Signature LED Products

FL16-4000ew / FL16-4020ew / FL16-4050ew
FL16-7W5000eG-2 / FL16-7W5020eG-2
FL16-7W5040eG-2 / FL16-7W5050eG-2
FL16-7W4000ew / FL16-7W4020ew
FL16-7W4040ew / FL16-7W4050ew

PAR20 Class

EVERYDAY LED LINE Signature LED Products

FL20-7W6000e-2 / FL20-7W6020e-2
FL20-7W6040e-2 / FL20-7W6050e-2

E-LITE LED LINE Premium LED Products

FL20-5050cecw-2

PAR30 Class

EVERYDAY LED LINE Signature LED Products

FL30-11W6000e / FL30-11W6020e
FL30-11W6040e / FL30-11W6050e
FL30-11W6000es / FL30-11W6020es
FL30-11W6040es / FL30-11W6050es

E-LITE LED LINE Premium LED Products

FL30-10W5000cec-2 / FL30-10W5020cec-2 / FL30-10W5040cec-2 / FL30-10W5050cec-2
FL30-11W5000cecs-2 / FL30-11W5020cecs-2 / FL30-11W5040cecs-2 / FL30-11W5050cecs-2

PAR38 Class

EVERYDAY LED LINE Signature LED Products

FL38-15W6000e / FL38-15W6020e
FL38-15W6040e / FL38-15W6050e
FL38-20W6001e / FL38-20W6021e
FL38-20W6041e / FL38-20W6051e

E-LITE LED LINE Premium LED Products

FL38-12W5000cec-2 / FL38-12W5040cec-2

PAR16 & PAR20 Class

Residential Lighting | General Purpose



PAR16

FL16-4000ew
FL16-4020ew
FL16-4050ew

PAR16

FL16-7W5000eG-2
FL16-7W5020eG-2
FL16-7W5040eG-2
FL16-7W5050eG-2

PAR16

FL16-7W4000ew
FL16-7W4020ew
FL16-7W4040ew
FL16-7W4050ew

PAR20

FL20-7W6000e-2
FL20-7W6020e-2
FL20-7W6040e-2
FL20-7W6050e-2

PAR20

FL20-5.5W5020cec-2
FL20-5.5W5040cec-2
FL20-5050cecw-2

Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.		
EVERYDAY LED LINE Signature Products													* Clear Plastic Lens							
FL16-4000ew (3000K), FL16-4020ew (2700K)																				
7 W	50 W	120 V	450 lm	40°	Flood	90+	64 lm/W	0.9	0.07 A	GU10	25,000 Hrs.	1.9" x 2.1"	Yes	Yes	No	Yes	Yes	1		
FL16-4050ew (5000K)																				
7 W	50 W	120 V	450 lm	40°	Flood	90+	64 lm/W	0.9	0.07 A	GU10	25,000 Hrs.	1.9" x 2.1"	Yes	Yes	No	No	Yes	1		
FL16-7W5000eG-2 (3000K), FL16-7W5020eG-2 (2700K), FL16-7W5040eG-2 (4000K), FL16-7W5050eG-2 (5000K)																				
7 W	50 W	120 V	500 lm	40°	Flood	80	100 lm/W	0.7	0.07 A	GU10	25,000 Hrs.	1.9" x 2.1"	Yes	Yes	No	No	Yes	2		
FL16-7W4000ew (3000K), FL16-7W4020ew (2700K), FL16-7W4040ew (4000K), FL16-7W4050ew (5000K)																				
7 W	50 W	120 V	500 lm	40°	Flood	80	71 lm/W	0.7	0.07 A	E26	25,000 Hrs.	1.9" x 2.7"	Yes	Yes	No	No	Yes	1		
FL20-7W6000e-2 (3000K), FL20-7W6020e-2 (2700K), FL20-7W6040e-2 (4000K), FL20-7W6050e-2 (5000K)																				
7 W	50 W	120 V	500 lm	40°	Flood	80	71 lm/W	0.7	0.085 A	E26	25,000 Hrs.	2.4" x 3.1"	Yes	Yes	No	No	Yes	2		
E-LITE LED LINE Premium Products													* Clear Plastic Lens							
FL20-5.5W5020cec-2 (2700K), FL20-5.5W5040cec-2 (4000K)																				
5.5 W	50 W	120 V	500 lm	40°	Flood	90+	91 lm/W	0.9	0.05 A	E26	25,000 Hrs.	2.4" x 3.1"	Yes	Yes	Yes	Yes	Yes	2		
FL20-5050cecw-2 (5000K)																				
5.5 W	50 W	120 V	500 lm	40°	Flood	90+	91 lm/W	0.9	0.05 A	E26	25,000 Hrs.	2.4" x 3.1"	Yes	Yes	Yes	No	Yes	2		

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

PAR30 Class

Residential Lighting | General Purpose



PAR30 Short Neck

- FL30-11W6000es
- FL30-11W6020es
- FL30-11W6040es
- FL30-11W6050es
- FL30-11W5000cecs-2
- FL30-11W5020cecs-2
- FL30-11W5040cecs-2
- FL30-11W5050cecs-2

PAR30 Long Neck

- FL30-11W6000e
- FL30-11W6020e
- FL30-11W6040e
- FL30-11W6050e
- FL30-10W5000cec-2
- FL30-10W5020cec-2
- FL30-10W5040cec-2
- FL30-10W5050cec-2

Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.			
EVERYDAY LED LINE Signature Products													* Clear Plastic Lens								
FL30-11W6000es (3000K), FL30-11W6020es (2700K), FL30-11W6040es (4000K), FL30-11W6050es (5000K) - <i>Short Neck</i>																					
11 W	75 W	120 V	850 lm	40°	Flood	80	77 lm/W	0.7	0.13 A	E26	25,000 Hrs.	3.7" x 3.6"	Yes	Yes	No	No	Yes	1			
FL30-11W6000e (3000K), FL30-11W6020e (2700K), FL30-11W6040e (4000K), FL30-11W6050e (5000K) - <i>Long Neck</i>																					
11 W	75 W	120 V	850 lm	40°	Flood	80	77 lm/W	0.7	0.13 A	E26	25,000 Hrs.	3.7" x 4.5"	Yes	Yes	No	No	Yes	1			
E-LITE LED LINE Premium Products													* Clear Plastic Lens								
FL30-11W5000cecs-2 (3000K), FL30-11W5020cecs-2 (2700K), FL30-11W5040cecs-2 (4000K) - <i>Short Neck</i>																					
11 W	75 W	120 V	975 lm	40°	Flood	90+	88 lm/W	0.7	0.1 A	E26	25,000 Hrs.	3.7" x 3.6"	Yes	Yes	Yes	Yes	Yes	2			
FL30-11W5050cecs-2 (5000K) - <i>Short Neck</i>																					
11 W	75 W	120 V	975 lm	40°	Flood	90+	88 lm/W	0.7	0.1 A	E26	25,000 Hrs.	3.7" x 3.6"	Yes	Yes	Yes	No	Yes	2			
FL30-10W5000cec-2 (3000K), FL30-10W5020cec-2 (2700K), FL30-10W5050cec-2 (5000K) - <i>Long Neck</i>																					
10 W	75 W	120 V	900 lm	40°	Flood	90+	90 lm/W	0.9	0.09 A	E26	25,000 Hrs.	3.7" x 4.5"	Yes	Yes	Yes	Yes	Yes	2			
FL30-10W5050cec-2 (5000K) - <i>Long Neck</i>																					
10 W	75 W	120 V	900 lm	40°	Flood	90+	90 lm/W	0.9	0.09 A	E26	25,000 Hrs.	3.7" x 4.5"	Yes	Yes	Yes	No	Yes	2			

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

PAR38 Class

Residential Lighting | General Purpose



PAR38 Class
 FL38-15W6000e
 FL38-15W6020e
 FL38-15W6040e
 FL38-15W6050e
 FL38-12W5000cecw-2
 FL38-12W5040cecw-2
 FL38-5050cecw-2



PAR38 Class
 FL38-20W6001e
 FL38-20W6021e
 FL38-20W6041e
 FL38-20W6051e

Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	JA8	Dim.	Qty.			
EVERYDAY LED LINE Signature Products													* Clear Plastic Lens								
FL38-15W6000e (3000K), FL38-15W6020e (2700K), FL38-15W6040e (4000K), FL38-15W6050e (5000K)																					
15 W	120 W	120 V	1250 lm	40°	Flood	80	83 lm/W	0.7	0.175 A	E26	25,000 Hrs.	4.7" x 5"	Yes	Yes	No	No	Yes	1			
FL38-20W6001e (3000K), FL38-20W6021e (2700K), FL38-20W6041e (4000K), FL38-20W6051e (5000K)																					
20 W	150 W	120 V	1700 lm	45°	Flood	80	85 lm/W	0.7	0.18 A	E26	25,000 Hrs.	4.7" x 5.1"	Yes	Yes	No	No	Yes	1			
E-LITE LED LINE Premium Products													* Clear Plastic Lens								
FL38-12W5000cecw-2 (3000K), FL38-12W5040cec-2 (4000K)																					
12 W	100 W	120 V	1050 lm	40°	Flood	90+	87 lm/W	0.9	0.1 A	E26	25,000 Hrs.	4.7" x 5.1"	Yes	Yes	Yes	Yes	Yes	2			
FL38-5050cecw-2 (5000K)																					
12 W	100 W	120 V	1050 lm	40°	Flood	90+	87 lm/W	0.9	0.1 A	E26	25,000 Hrs.	4.7" x 5.1"	Yes	Yes	Yes	No	Yes	2			

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

General Purpose LED MR Lamp





Compact and convenient, Felangi's "MR" Multi-faceted Reflector LED Lamps focus illumination on a specific target, making them essential for track, recessed, and landscape lighting. Wide flood beam angles paired with small lens diameter help these LED spotlights highlight and direct attention to products, art, or décor on display.



MR16 Class

FL16-7W4000ew
FL16-7W4020ew
FL16-7W4040ew
FL16-7W4050ew

 Damp Rated

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	Dim.	Qty.	
EVERYDAY LED LINE Signature Products												* Clear Plastic Lens					
FL16-7W4000ew(3000K), FL16-7W4020ew(2700K), FL16-7W4040ew(4000K), FL16-7W4050ew(5000K)																	
7 W	50 W	12 V	500 lm	40°	Flood	80	71 lm/W	0.7	0.62 A	GU5.3	25,000 Hrs.	1.97 x 1.96"	Yes	Yes	Yes	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Decorative LED Filament Lamp



Appealing and enchanting, Felangi's LED Filament Lamps use narrow LED strips to achieve the same vintage and classic aesthetic of traditional incandescent light Lamps, while saving up to ten times more energy. Offered in a variety of shapes A (Arbitrary), B (Bullet tip), BA (Bullet Angular tip), G (Globe), and ST (Straight Tubular) to suit any room's mood, these decorative LED Lamps emit a warm ambient glow for a welcoming and relaxing atmosphere.

A19 Class (Arbitrary)

■ LED FILAMENT Vintage LED Products

FL19-3001e / FL19-3020e (Clear)
FL19-3000cec / FL19-3020cec / FL19-3050cec (Clear)
FL19-3020ef (Frosted)
FL19-3020ea / FL19-3020ad (Amber)

A15 Class (Arbitrary)

■ LED FILAMENT Vintage LED Products

FL15-3020e-4 (Clear)
FL15-3020ea-4 (Amber)

B10 Class (Bullet Tip)

■ LED FILAMENT Vintage LED Products

FL10-3020e-4 (Clear)
FL10-3000cec-4 / FL10-3020cec-4 / FL10-3050cec-4 (Clear)
FL10-3020ef-4 (Frosted)
FL10-3020ea-4 (Amber)

BA10 Class (Bullet Angular Tip)

■ LED FILAMENT Vintage LED Products

FL10-3020e-4 (Clear)
FL10-3020ef-4 (Frosted)
FL10-3020ea-4 (Amber)

G25 Class (Globe)

■ LED FILAMENT Vintage LED Products

FL25-3020e (Clear)
FL25-3020ea / FL25-3020ad (Amber)

ST19 Class (Straight Tubular)

■ LED FILAMENT Vintage LED Products

FL19-3000e / FL19-3020e (Clear)
FL19-3020ea (Amber)

S14 Class (String)

■ LED FILAMENT Vintage LED Products

FL14-2W1120 (Clear)

Filament Class

Residential Lighting | Decorative



A19 Class (Arbitrary)
FL19-3001e
FL19-3020e
FL19-3000cec
FL19-3020cec
FL19-3050cec



S14 Class (String)
FL14-2W1120



A15 Class (Arbitrary)
FL15-3020e-4



B10 Class (Bullet Tip)
FL10-3000cec-4
FL10-3020cec-4
FL10-3050cec-4



B10 Class (Bullet Tip)
FL10-3020e-4



BA10 Class (Bullet Angular Tip)
FL10-3020e-4



G25 Class (Globe)
FL25-3020e



ST19 Class (Straight Tubular)
FL19-3020e
FL19-3020e

Wet Rated Damp Rated Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Glass Lens	Center Beam	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	Dim.	Qty.			
LED FILAMENT Vintage Product														* Clear Glass Lens		UL		E-star		CEC	
● FL19-3001e(3000K)																					
10 W	75 W	120 V	1100 lm	320°	Clear Glass	N/A	80	110 lm/W	0.7	0.085 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	No	Yes	1			
● FL19-3020e(2700K)																					
7 W	60 W	120 V	800 lm	320°	Clear Glass	N/A	80	114 lm/W	0.7	0.085 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	No	Yes	1			
● FL19-3000cec(3000K), FL19-3020cec(2700K), FL19-3050cec(5000K)																					
8.5 W	60 W	120 V	800 lm	320°	Clear Glass	N/A	90	94 lm/W	0.7	0.095 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	Yes	Yes	1			
● FL14-2W1120e(2700K)																					
2 W	25 W	120 V	180 lm	320°	Clear Glass	N/A	80	90 lm/W	0.7	0.019 A	E26	15,000 Hrs.	1.8" x 3.2"	Yes	No	No	No	1			
● FL15-3020e-4(2700K)																					
4.5 W	40 W	120 V	450 lm	320°	Clear Glass	N/A	80	100 lm/W	0.7	0.06 A	E26	15,000 Hrs.	1.8 x 3.4"	Yes	Yes	No	Yes	4			
● FL10-3000cec-4(3000K), FL10-3020cec-4(2700K), FL10-3050cec-4(5000K)																					
5.5 W	60 W	120 V	500 lm	320°	Clear Glass	N/A	90	90 lm/W	0.7	0.065 A	E12	15,000 Hrs.	1.3" x 3.8"	Yes	Yes	Yes	Yes	4			
● FL10-3020e-4(2700K)																					
4.5 W	60 W	120 V	500 lm	320°	Clear Glass	N/A	80	111 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 3.8"	Yes	Yes	No	Yes	4			
● FL10-3020e-4(2700K)																					
4.5 W	60 W	120 V	500 lm	320°	Clear Glass	N/A	80	111 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 4.2"	Yes	Yes	No	Yes	4			
● FL25-3020e(2700K)																					
7 W	100 W	120 V	800 lm	320°	Clear Glass	N/A	80	114 lm/W	0.7	0.075 A	E26	15,000 Hrs.	3.1" x 4.5"	Yes	Yes	No	Yes	1			
● FL19-3000e(3000K), FL19-3020e(2700K)																					
7 W	75 W	120 V	800 lm	320°	Clear Glass	N/A	80	114 lm/W	0.7	0.085 A	E26	15,000 Hrs.	2.5" x 5.5"	Yes	Yes	No	Yes	1			

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Filament Class

Residential Lighting | Decorative



💧 Wet Rated
 🌧️ Damp Rated
 🔴 Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Glass Lens	Center Beam	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	Dim.	Qty.		
LED FILAMENT Vintage Product													* Amber Glass Lens						
💧 🔴 FL19-3020ea (2200K)																			
7 W	40 W	120 V	600 lm	320°	Amber Glass	N/A	80	85 lm/W	0.7	0.085 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	Yes	1		
💧 🔴 FL15-3020ea (2200K)																			
4.5 W	25 W	120 V	360 lm	320°	Amber Glass	N/A	80	80 lm/W	0.7	0.06 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	Yes	1		
💧 🔴 FL10-3020ea-4 (2200K)																			
4.5 W	40 W	120 V	350 lm	320°	Amber Glass	N/A	80	77 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 3.8"	Yes	Yes	Yes	4		
💧 🔴 FL10-3020ea-4 (2200K)																			
4.5 W	40 W	120 V	350 lm	320°	Amber Glass	N/A	80	77 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 4.2"	Yes	Yes	Yes	4		
💧 🔴 FL25-3020ea (2200K)																			
7 W	75 W	120 V	600 lm	320°	Amber Glass	N/A	80	85 lm/W	0.7	0.075 A	E26	15,000 Hrs.	3.1" x 4.5"	Yes	Yes	Yes	1		
💧 🔴 FL19-3020ea (2200K)																			
5.5 W	60 W	120 V	500 lm	320°	Amber Glass	N/A	80	90 lm/W	0.7	0.06 A	E26	15,000 Hrs.	2.5" X 5.5"	Yes	Yes	Yes	1		

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Filament Class

Residential Lighting | Decorative



**A19 Class
(Arbitrary)**
FL19-3020ad



**G25 Class
(Globe)**
FL25-3020ad



**A19 Class
(Arbitrary)**
FL19-3020ef



**B10 Class
(Bullet Tip)**
FL10-3020ef-4



**BA10 Class
(Bullet Angular Tip)**
FL10-3020ef-4

💧 Wet Rated
 🌧️ Damp Rated
 🟡 Fully Enclosed Suitable

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Glass Lens	Center Beam	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	Dim.	Qty.
LED FILAMENT Vintage Product													* Amber Glass Lens			
💧 🟡 FL19-3020ad(2200K)																
4.5 W	N/A	120 V	250 lm	320°	Amber Glass	N/A	80	55 lm/W	0.7	0.05 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	1
💧 🟡 FL25-3020ad(2200K)																
4.5 W	N/A	120 V	250 lm	320°	Amber Glass	N/A	80	55 lm/W	0.7	0.05 A	E26	15,000 Hrs.	3.1" x 4.5"	Yes	Yes	1
💧 🟡 FL19-3020ef(2700K)																
8 W	60 W	120 V	800 lm	320°	Frosted Glass	N/A	80	100 lm/W	0.7	0.095 A	E26	15,000 Hrs.	2.3" x 4.1"	Yes	Yes	1
💧 🟡 FL10-3020ef-4(2700K)																
4.5 W	40 W	120 V	450 lm	320°	Frosted Glass	N/A	80	100 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 3.8"	Yes	Yes	4
💧 🟡 FL10-3020ef-4(2700K)																
4.5 W	40 W	120 V	450 lm	320°	Frosted Glass	N/A	80	100 lm/W	0.7	0.045 A	E12	15,000 Hrs.	1.3" x 3.8"	Yes	Yes	4

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Decorative LED Flame Lamp



Built to emulate the motion, irradiance, and charm of natural candlelight, Felangi's LED Flame Lamps are ideal for ceiling lamps and decorative wall fixtures. Thoughtfully designed with a flame-like shape and warm, golden glow, these LED flame Lamps are built with over 300 programmed LEDs to provide a striking resemblance to traditional candle lights.



FL9.5-2120fc



FL9.5-2120fcb

Damp Rated

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	Qty.
LED FLAME Decorative Products											* Clear Glass Lens		
FL9.5-2120fc, FL9.5-2120fcb(1800K)													
1 W	6 W	120V	80 lm	120°	80	80 lm/W	0.5	0.01A	E12	15,000 Hrs.	1.4" x 4"	Yes	1

2700K Warm White
3000K Soft White
4000K Bright White
5000K Cool White

Wi-Fi Enabled LED Smart Lighting



Made to add simplicity, efficiency, and color to every home, Smart LED Lamps allow for wireless control from anywhere. Because no hub is required, smart Lamps simply connect to any home's Wi-Fi and are effortlessly controlled with the free Life in Sync mobile app. With the tap of a finger, anyone can set their smart lamp to turn on or off whenever, choose between 16 million different color options, or create a specific scene to revisit. By using simple voice command, this Wi-Fi enabled LED Lamps to dim up or down, range between 2000K-5000K, or turn on or off from anywhere.



- True Color
- Damp Rated
- Tunable White CCT
- Multicolor CCT + RGB

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Beam Type	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	E-star	CEC	Dim.	Qty.		
SMART Wi-Fi Enabled Products													* Frosted Plastic Lens						
FL-A1000 (2000K-5000K)																			
10 W	60 W	120 V	800 lm	205°	Omni-Direc tional	80+	80 lm/W	0.5	140 A	E26	15,000 Hrs.	2.4 x 4.3"	Yes	No	No	Yes	1		
FL-A2001cec (2700K-5000K)																			
9 W	60 W	120 V	810 lm	220°	Omni-Direc tional	90	90 lm/W	0.7	0.85 A	E26	25,000 Hrs.	2.4 x 4.5"	Yes	Yes	Yes	Yes	1		
FL-B1002 (2000K-5000K)																			
10 W	60 W	120 V	650 lm	110°	Flood	80+	65 lm/W	0.5	140 A	E26	15,000 Hrs.	3.7 x 5"	Yes	No	No	Yes	1		
FL-B1003 (2000K-5000K)																			
10 W	60 W	120 V	650 lm	110°	Flood	80+	65 lm/W	0.5	140 A	E26	15,000 Hrs.	3.7 x 5"	Yes	No	No	Yes	1		
FL-DLC1000e (2700K-5000K)																			
13 W	75 W	120 V	900 lm	80°	Flood	80	69 lm/W	0.7	0.12 A	E26	35,000 Hrs.	3.6 x 7.5"	Yes	Yes	No	Yes	1		



Commercial Lighting

Our powerful commercial products were developed to endure long hours of use supporting your business at all times. Durable and rugged materials used during production ensure constant performance in every use. Felangi is committed to safety and efficiency. Therefore, we work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our commercially ranked products are suitable for use in offices, workshops, garages, retail stores and commercial spaces. To learn more, we encourage you to continue exploring what Felangi has waiting for you.



Commercial LED PL Lamp



An energy saving alternative to fluorescent lighting, Felangi's LED PL Series is suitable for a wide variety of commercial applications. Built to last and provide quality bright light, these PL lamps are available in vertical or horizontal direct replacement options.

Hybrid (Type A+B) Fast and Effortless Installation + Optimal Maintenance Savings




Horizontal
FL-2100H
FL-2140H
FL-2150H

Vertical
FL-2100Hv
FL-2140Hv
FL-2150Hv


Damp Rated

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Size (Ø x H)	UL	DLC	Qty.	
COMMERCIAL LIGHTING																
												* Frosted Plastic Lens				
FL-2100H(3000K), FL-2140H(4000K), FL-2150H(5000K)																
12 W	26 W	AC120-277V	1100 lm	140°	80	90 lm/W	0.9	0.4 A	G24Q	50,000 Hrs.	Hybrid	1.3 x 5.8"	Yes	No	1	
FL-2100Hv(3000K), FL-2140Hv(4000K), FL-2150Hv(5000K)																
12 W	26 W	AC120-277V	1100 lm	140°	80	90 lm/W	0.9	0.4 A	G24Q	50,000 Hrs.	Hybrid	3 x 3.78"	Yes	No	1	


Retrofit with One Lamp (G24Q Base)

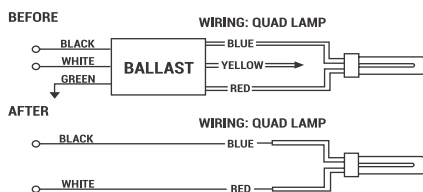

Retrofit with Two Lamp (G24Q Base)

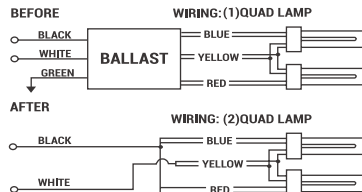

Direct plug and play with ballast

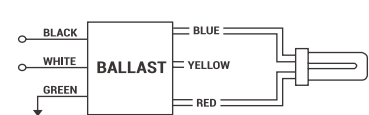


Commercial LED Tube-Linear



Felangi's most convenient and accommodating collection, the LED Linear Series is made available in a number of shapes, sizes, and methods for installation. Most commonly used in parabolic and indirect light fixtures within commercial spaces, these LED tubes provide better brightness while using less than half the energy fluorescent tubes consume.

Hybrid (Type A+B) Fast and Effortless Installation + Optimal Maintenance Savings

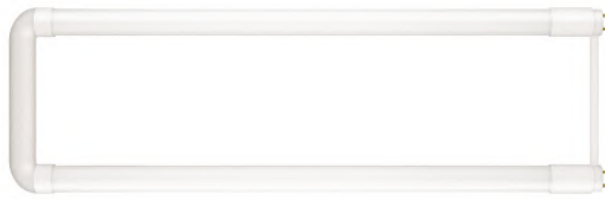

T5 Class

FL5-24W304H
FL5-24W305H

T8 Class

FL8-15W50SH
FL8-18W50SH


U-Shaped Class

FL-15W304H
FL-15W305H

Damp Rated

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Material	Size (H x Ø)	UL	DLC	Qty.
FL5 LED Tubes																
FL5-24W304H(4000K), FL5-24W305H(5000K)																
24 W	54 W	AC120-277 V	3200 lm	120°	83	133 lm/W	0.9	0.22 A	G5	50,000 Hrs.	Hybrid	Frosted Glass	45.8" x 0.7"	Yes	Yes	25
FL8 LED Tubes																
FL8-15W50SH(3500K/4000K/5000K) 3 CCT Selectable																
15 W	32 W	AC120-277 V	1850 lm 1900 lm 2000 lm	200°	83	123 lm/W 127 lm/W 133 lm/W	0.9	0.139 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	47.1" x 1"	Yes	Yes	20
FL8-18W50SH (3500K/4000K/5000K) 3 CCT Selectable																
18 W	32 W	AC120-277 V	2450 lm 2600 lm 2700 lm	200°	83	136 lm/W 144 lm/W 150 lm/W	0.9	0.167 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	47.1" x 1"	Yes	Yes	20
U-Shaped LED Tubes																
FL-15W304H(4000K), FL-15W305H(5000K)																
15 W	32 W	AC120-277 V	1950 lm	160°	83	130 lm/W	0.9	0.139 A	G13	50,000 Hrs.	Hybrid	Frosted Glass	22.4" x 7"	Yes	Yes	10

Commercial LED Corn Bulb

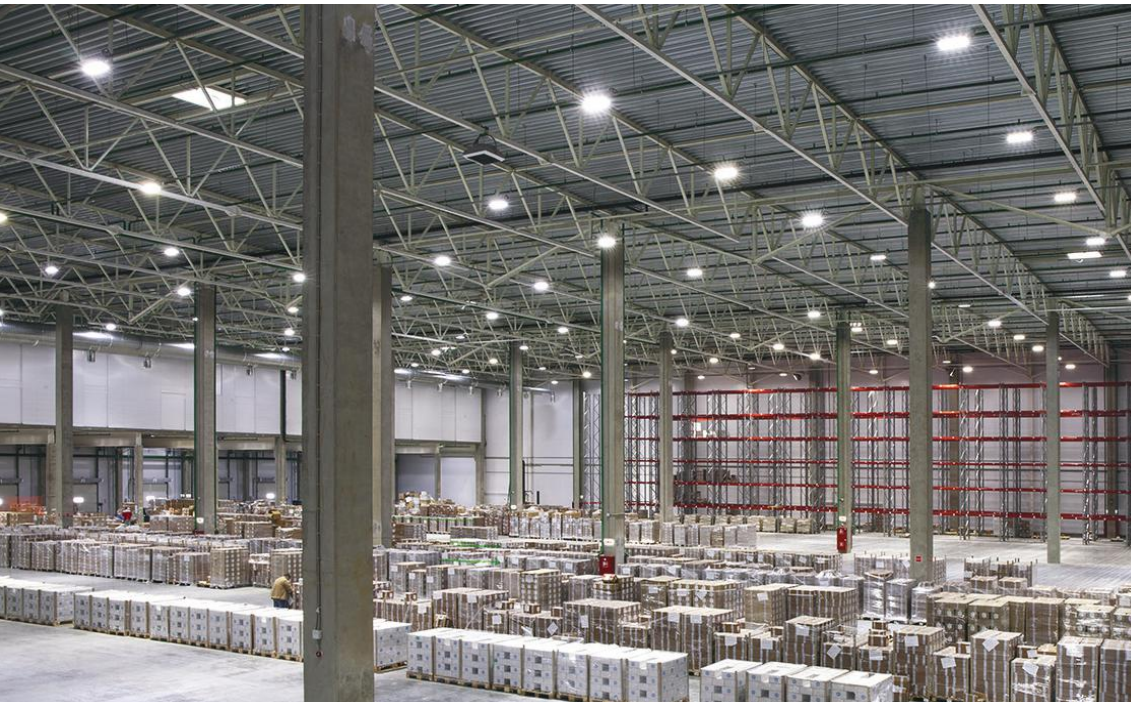

Experience the new generation corn bulbs with 9 in 1 option to suit your desired light requirements. Our new generation single corn bulbs come in multiple sizes and can be color-tunable as well as wattage tunable. Color tunable ranges between Warm White (3000K), Bright White (4000K), and Cool White (5000K) color temperatures. Whereas, a wattage tunable will give you the brightness of 3 wattages on a single corn bulb using a knob. Aesthetically designed and can be used inside the enclosed fixture in an outdoor environment. Felangi Corn bulbs have a sturdy construction and excellent cooling technology with an aluminum structure for better heat dissipation and an extra-long lifetime.




FL27W-303sw



FL63W-303sw








FL120W-303sw



Switch to adjust CCT
(3000K / 4000K / 5000K)

Knob to adjust Wattage
& Dimming

New Item **IP64 Protection** **Damp Rated**

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Install Type	Size (Ø x H)	UL	DLC	Qty.
LED Lamps Commercial Products															
* Clear Plastic Lens  															
NEW  FL27W-303sw (3000K/4000K/5000K) 3 CCT & 3 Wattage Selectable															
27 W	60W CFL,100W MHL		3645 - 4050 lm												
18 W	42W CFL,70W MHL	AC100-277V	2484 - 2790 lm	360°	80	135-150 lm/W	0.9	0.3 A	E26	50,000 Hrs.	Bypass Ballast	2.36" x 7.42"	Yes	Yes	1
12 W	30W CFL,50W MHL		1680 - 1908 lm												
NEW  FL63W-303sw (3000K/4000K/5000K) 3 CCT & 3 Wattage Selectable															
63 W	120W CFL,175W MHL		8694 - 4050 lm												
54 W	120W CFL,175W MHL	AC100-277V	7560 - 8370 lm	360°	80	135-150 lm/W	0.9	0.7 A	E39	50,000 Hrs.	Bypass Ballast	3.34" x 10.11"	Yes	Yes	1
36 W	80W CFL,150W MHL		5112 - 5724 lm												
NEW  FL120W-303SW (3000K/4000K/5000K) 3 CCT & 3 Wattage Selectable															
120 W	200W CFL,400W MHL		16440 - 18240 lm												
100 W	150W CFL,250W MHL	AC100-277V	13862 - 15572 lm	360°	80	135-150 lm/W	0.9	1.2 A	E39	50,000 Hrs.	Bypass Ballast	5.11" x 11.14"	Yes	Yes	1
80 W	150W CFL,250W MHL		11280 - 12560 lm												

Bypass Ballast (Type B) Optimal Maintenance Savings (Built-in Driver)

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial Light Engine-MPLR



MPLR is made for seamless light output and hassle-free installation, LED modules are perfect for new or existing light fixtures. Once your existing incandescent, fluorescent or LED- integrated light fixture burns out, simply retrofit this MPLR (multi-purpose LED retrofit) into the fixture's housing. By offering easy, toolless installation, installing this LED module is as simple as screwing in a light lamp. Installing this MPLR eliminates the chore of replacing existing LED fixtures and retrofits incandescent fixtures while reducing unsightly hot spots. For optimal light output, Felangi recommends retrofitting fixtures 16" or less in diameter.



FL-1000cec-16
FL-1040cec-16



FL-1000cec-19
FL-1040cec-19

Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	Center Beam	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	ETL	E-star	CEC	JA8	Dim.	Qty.
RETOFIT LED LINE Commercial Products												* Clear Plastic Lens						
FL-1000cec-16(3000K), FL-1040cec-16(4000K)																		
16 W	100 W	120V/60Hz	1140 lm	180°	N/A	90+	72 lm/W	0.9	0.144 A	Connector	50,000 Hrs.	5.7" x 1.2"	Yes	Yes	Yes	Yes	Yes	1
FL-1000cec-19(3000K), FL-1040cec-19(4000K)																		
19 W	120 W	120V/60Hz	1420 lm	180°	N/A	90+	74 lm/W	0.9	0.172 A	Connector	50,000 Hrs.	7.3" x 1.2"	Yes	Yes	Yes	Yes	Yes	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Downlight



Versatile and innovative, Felangi's LED Downlight Series offers a wide variety of retrofit kits in convenient sizes and favored color temperatures. Built for recessed lighting, these LED downlights are carefully designed to guarantee instant and uncomplicated installation within any residential space.

Fixed Class

■ Commercial LED Products

FL-4020e (5 - 6 in. Housing)
FL-5020e / FL-5040e (5 - 6 in. Housing)
FL4-1040e / FL4-1050e (4 in. Housing)
FL4-2000e / FL4-2020e / FL4-2040e (4 in. Housing)
FL6C-18W103swej (6 in. Housing) / FL8C-22W103swej (8 in. Housing)
FL4-10W100swj (4 in. Housing) / FL6-14W100swj (6 in. Housing)
FL4S-2000e / FL4S-2040e / FL4S-2050e (4 in. Fixed)
FL6S-2000e / FL6S-2040e / FL6S-2050e (6 in. Fixed)
FL6S-2000ej / FL6S-2040ej (6 in. Fixed)
FL6SQ-2000e / FL6SQ-2040e (6 in. Fixed)
FL4S-10W105se (4 in. Fixed)
FL6S-12W105se (6 in. Fixed)

LED Downlight

Commercial Lighting



Damp Rated
 Wet Rated
 True Color
 Tunable White CCT
 Multicolor CCT + RGB

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	ETL	E-star	CEC	T24	JA8	Dim.	Qty.
LED Downlights Commercial Products											* Frosted Plastic Lens								
FL-4020e(2700K)																			
12 W	75W	120 V	840 lm	96°	90+	70 lm/W	0.9	0.11A	E26	35,000 Hrs.	7.5" x 3"	Yes	No	Yes	Yes	No	Yes	Yes	1Kit
FL-5020e(2700K)																			
18 W	115W	120 V	1260 lm	96°	90+	70 lm/W	0.9	0.16 A	E26	35,000 Hrs.	7.5" x 3"	Yes	No	Yes	Yes	No	Yes	Yes	1Kit
FL4-1040e(4000K), FL4-1050e(5000K)																			
13 W	75W	120 V	800 lm	95°	90+	61 lm/W	0.9	0.01 A	E26	50,000 Hrs.	5.7" x 2.5"	Yes	Yes	Yes	No	Yes	No	Yes	1Kit
FL4-2000e(3000K), FL4-2020e(2700K), FL4-2040e(4000K)																			
13W	80W	120 V	910 lm	92°	90+	70 lm/W	0.9	0.12 A	E26	35,000 Hrs.	5.4" x 2.7"	Yes	No	Yes	Yes	No	Yes	Yes	1Kit
FL6C-18W103swej(3000K / 3500K / 4000K) 3 CCT & 3 Wattage Selectable																			
7 W			700 lm																
10 W	N/A	120 V	1000 lm	90°	90+	96 lm/W	0.9	0.15-0.04 A	Wire	50,000 Hrs.	8.2" x 5.1"	Yes	No	Yes	No	Yes	Yes	Yes	1Kit
18 W			1500 lm																
FL8C-22W103swej(3000K / 3500K / 4000K) 3 CCT & 3 Wattage Selectable																			
10 W			1000 lm																
15 W	N/A	120 V	1500 lm	90°	90+	96 lm/W	0.9	0.185-0.06 A	Wire	50,000 Hrs.	10.2" x 5.8"	Yes	No	Yes	No	Yes	Yes	Yes	1Kit
22 W			2000 lm																
SMART Wi-Fi Enabled Product											* Frosted Plastic Lens								
FL-DLC1000e (2700K-5000K)																			
13 W	75 W	120 V	900 lm	80°	80	69 lm/W	0.7	0.12 A	E26	35,000 Hrs.	3.6" x 7.5"	Yes	No	Yes	No	No	No	No	1Kit

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

LED Downlight

Commercial Lighting



FL4-10W100swj



FL6-14W100swj



FL4S-2000e
FL4S-2040e
FL4S-2050e
FL4S-10W105se



FL6S-2000e
FL6S-2040e
FL6S-2050e
FL6S-2000ej
FL6S-2040ej
FL6S-12W1050se



FL6SQ-2000e
FL6SQ-2040e

New Item Damp Rated True Color

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	UL	ETL	E-star	CEC	T24	JA8	Dim.	Qty.
LED Downlights Commercial Products																			
NEW FL4-10W100swj (2700K/ 3000K/ 3500K/ 4000K/ 5000K) 5 CCT Selectable																			
10W	50W	120 V	650-750 lm	120°	80	65 - 75 lm/W	0.9	0.09 A	E26 Adapter	50,000 Hrs.	5.1" x 2.8"	No	Yes	Yes	No	Yes	No	Yes	1Kit
NEW FL6-14W100swj (2700K/ 3000K/ 3500K/ 4000K/ 5000K) 5 CCT Selectable																			
14W	70W	120 V	900-1000 lm	120°	80	64 - 71 lm/W	0.9	0.125 A	E26 Adapter	50,000 Hrs.	5.1" x 2.8"	No	Yes	Yes	No	Yes	No	Yes	1Kit
FL4S-2000e (3000K), FL4S-2040e (4000K), FL4S-2050e (5000K)																			
9W	60W	120 V	600 lm	120°	80	66 lm/W	0.9	0.075 A	Junction Box	30,000 Hrs.	4.7" x 0.4"	No	Yes	Yes	No	No	No	Yes	1Kit
FL6S-2000e (3000K), FL6S-2040e (4000K), FL6S-2050e (5000K)																			
12W	100W	120 V	900 lm	120°	80	75 lm/W	0.9	0.1 A	Junction Box	30,000 Hrs.	6.7" x 0.4"	No	Yes	Yes	No	No	No	Yes	1Kit
FL6S-2000ej (3000K), FL6S-2040ej (4000K)																			
12W	100W	120 V	900 lm	120°	90+	75 lm/W	0.9	0.1 A	Junction Box	50,000 Hrs.	6.9" x 0.4"	No	Yes	Yes	No	No	Yes	Yes	1Kit
FL4S-10W105se (2700K/ 3000K/ 3500K/ 4000K/ 5000K) 5 CCT Selectable																			
10W	65W	120 V	650 lm	120°	80	65 lm/W	0.9	0.1 A	Junction Box	35,000 Hrs.	4.8" x 0.8"	No	Yes	Yes	No	No	No	Yes	1Kit
FL6S-12W105se (2700K/ 3000K/ 3500K/ 4000K/ 5000K) 5 CCT Selectable																			
12W	80W	120 V	1000 lm	120°	80	83 lm/W	0.9	0.13 A	Junction Box	35,000 Hrs.	6.8" x 0.8"	No	Yes	Yes	No	No	No	Yes	1Kit
FL6SQ-2000e (3000K), FL6SQ-2040e (4000K)																			
12W	100W	120 V	900 lm	120°	80	75 lm/W	0.9	0.1 A	Junction Box	30,000 Hrs.	6.7" x 0.4"	No	Yes	Yes	No	No	No	Yes	1Kit

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Troffer



Eliminating maintenance worries and costs, Felangi's LED Troffers are built for uncomplicated installation, instant replacement, and long-lasting LED performance. Everything about these LED troffers, from the high lumen output to low-profile design make for a smart energy saving alternative to commercial fluorescent lighting.



FL22-35W103sw-2



FL24-50W103sw-2

Wet Rated Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	ETL	DLC	Dim.	Qty.	
LED FIXTURES Commercial Products										* Frosted Plastic Lens				
FL22-35W103sw-2 (3000/ 4000/ 5000K)				3 CCT & 2 Wattage Selectable										
25 W 35 W	AC120-277V	3125 lm 4375 lm	120°	80	125 lm/W	0.9	0.33 A	50,000 Hrs.	23.74" x 23.74"	Yes	Yes	Yes	2	
FL24-50W103sw-2 (3000/ 4000/ 5000K)				3 CCT & 3 Wattage Selectable										
33 W 40 W 50 W	AC120-277V	4125 lm 5000 lm 6250 lm	120°	80	125 lm/W	0.9	0.45 A	50,000 Hrs.	23.74" x 47.36"	Yes	Yes	Yes	2	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Flat Panel



Ideal for offices, schools, and other commercial applications, Felangi's LED Panel Series triumphs over inefficient fluorescent lighting. Carefully designed for optimal performance, these LED panels are built with a shatter-resistant PMMA lens and edge-lit technology, ensuring bright light is evenly distributed free of glare.

2x2 Class

■ LED FIXTURES Commercial LED Products

FL22-2040s-2 / FL22-2050s-2

FL22-2040sem-2 / FL22-2050sem-2

FL22-40W103sw-2

FL22-40W2000-2

1x4 Class

■ LED FIXTURES Commercial LED Products

FL14-40W103sw-2

2x4 Class

■ LED FIXTURES Commercial LED Products

FL24-2050s-2

FL24-2041s-2

FL24-2040sem-2

FL23-50W103sw-2

FL24-50W2000-2

LED Flat Panel

Commercial Lighting



New Item Emergency battery backup Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (L x W x H)	Lens Type	ETL	UL	DLC Premium	DLC	Dim.	Qty.	
LED FIXTURES Commercial Products												* Frosted Plastic Lens					
FL22-2040sem-2(4000K), FL22-2050sem-2(5000K) - Edge-lit																	
40 W	AC100 - 277V	4000 lm	120°	80	100 lm/W	0.95	0.6 A	50,000 Hrs.	23.7" x 23.7" x 0.4"	PMMA	No	Yes	No	Yes	Yes	2	
FL24-2050s-2(5000K) - Edge-lit																	
40 W	AC100 - 277V	5000 lm	120°	80	125 lm/W	0.9	1 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PMMA	No	Yes	Yes	Yes	Yes	2	
FL24-2041s-2(4000K) - Edge-lit																	
50 W	AC100 - 277V	6250 lm	120°	80	125 lm/W	0.95	0.6 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PMMA	No	Yes	Yes	Yes	Yes	2	
FL24-2040sem-2(4000K) - Edge-lit																	
50 W	AC100 - 277V	5000 lm	120°	80	100 lm/W	0.95	0.7 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PMMA	No	Yes	No	Yes	Yes	2	
FL14-40W103sw-2(3500K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable - Back-lit																	
25 W	AC120 - 277V	3125 lm	110°	80	125 lm/W	0.9	1 A	50,000 Hrs.	47.6" x 11.73" x 0.4"	PMMA	No	Yes	No	Yes	Yes	2	
30 W		3750 lm															
40 W		5000 lm															
FL22-40W103sw-2(3500K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable																	
25 W	AC120 - 277V	3125 lm	110°	80	125 lm/W	0.9	1 A	50,000 Hrs.	23.7" x 23.7" x 0.4"	PMMA	Yes	No	Yes	Yes	2		
30 W		3750 lm															
40 W		5000 lm															
FL24-50W103sw-2(3500K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable																	
30 W	AC120 - 277V	3750 lm	110°	80	125 lm/W	0.9	1.2 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PMMA	Yes	No	Yes	Yes	2		
40 W		5000 lm															
50 W		6250 lm															
FL22-40W2000-2(3000K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable - Back-lit																	
20 W	AC100 - 277V	2600 lm	110°	80	130 lm/W	0.9	0.19 A	50,000 Hrs.	23.7" x 23.7" x 0.4"	PC	Yes	No	No	Yes	Yes	2	
30 W		0.28 A															
40 W		0.38 A															
FL24-50W2000-2(3000K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable - Back-lit																	
30 W	AC100 - 277V	3900 lm	110°	80	130 lm/W	0.9	0.28 A	50,000 Hrs.	47.6" x 23.7" x 0.4"	PC	Yes	No	No	Yes	Yes	2	
40 W		0.38 A															
50 W		0.47 A															

2700K Warm White

3000K Soft White


4000K Bright White

5000K Cool White

Commercial LED Suspended Up & Down Light



This 50-Watt, 4-foot up and down light is a CCT selectable suspension light that is perfect for commercial spaces such as: office buildings, and healthcare facilities where quality light is needed. This light gives a long life of quality and equal light distribution in a variety of commercial spaces, and it offers convenience by allowing you to choose between Soft White (3000K), Bright White (4000K), and Cool White (5000K) all in one unit.

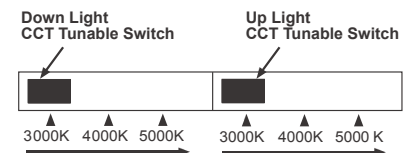

Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Material	Size (H x Ø)	UL	ETL	E-star	DLC	Qty.
LED FIXTURES Residential & Commercial Products															
FL4-50W103sw-W (3000K / 4000K / 5000K)															
50 W	120-277 V	6500 lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Glass & White housing	47.4" x 2.7" x 3.1"	No	Yes	No	Yes	1
FL4-50W103sw-S (3000K / 4000K / 5000K)															
50 W	120-277 V	6500 lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Glass & Metal Silver housing	47.4" x 2.7" x 3.1"	No	Yes	No	Yes	1
FL4-50W103sw-B (3000K / 4000K / 5000K)															
50 W	120-277 V	6500 lm	100°	80	130 lm/W	0.9	0.6 A	50,000 Hrs.	Frosted Glass & Black housing	47.4" x 2.7" x 3.1"	No	Yes	No	Yes	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Linear Fixture



Powerful LED Linear products built to withstand today's business demands. With versatility in mind, these LED products were built to provide installation and maintenance ease, as well as, to express a clean and modern look. We work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our commercially ranked products are suitable for use in offices, garages, workshops, warehouses, retail spaces, medical facilities and commercial buildings.



Linear Strip Light
FL4-45W103sw



Slim Wrap Light
FL4-48W103sw

 Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Material	Size (H x Ø)	UL	ETL	E-star	DLC	Qty.
LED FIXTURES Residential & Commercial Products															
FL4-45W103sw(3500K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable															
34 W 38 W 45 W	120-277 V	4420 lm 4940 lm 5850 lm	N/A	80	130 lm/W	0.9	0.75 A 0.85 A 1 A	50,000 Hrs.	Frosted Plastic & Steel Housing	47.3" x 3.5" x 3.3"	Yes	No	No	No	1
FL4-48W103sw(3500K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable															
32 W 40 W 48 W	120-277 V	3680 lm 4600 lm 5520 lm	N/A	80	115 lm/W	0.9	0.7 A 0.9 A 1.1 A	50,000 Hrs.	Frosted Plastic & Steel Housing	47.6" x 5.3" x 2.1"	Yes	No	No	No	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Canopy Light



Felangi Canopy light is great ways to save on your lighting bill as well as reducing your carbon footprint for the environment. it has a UL safety certification and qualify for utility rebate programs through DesignLights Consortium. The light is weatherproof (IP65) and can withstand outdoor conditions. Enjoy features such as: Energy Efficient, dimming options, Wet Rated, and IP65 Protection.



Square
FL-150W1050








Round
FL-55W103s



Round
FL-100W103s

 IP65 Protection  Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	UL	DLC	Dim.	Qty.	
LED FIXTURES Commercial Products										* Frosted Plastic Lens				
 FL-150W1050 (5000K)														
150 W	100 - 277V	20250 lm	120°	80	135 lm/W	0.9	1.67 A	50,000 Hrs.	15" x 15" x 3.3"	Yes	Yes	Yes	1	
 FL-55W103s (3000K / 4000K / 5000K) 3 CCT Selectable														
55 W	100 - 277V	6875 - 7700 lm	150°	80	125-140 lm/W	0.9	0.55 A	50,000 Hrs.	10" x 10" x 3.1"	Yes	Yes	Yes	1	
 FL-100W103s (3000K / 4000K / 5000K) 3 CCT Selectable														
100 W	100 - 277V	12500 - 14000 lm	150°	80	125-140 lm/W	0.9	1 A	50,000 Hrs.	11" x 11" x 3.1"	Yes	Yes	Yes	1	


2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED High Bay Light

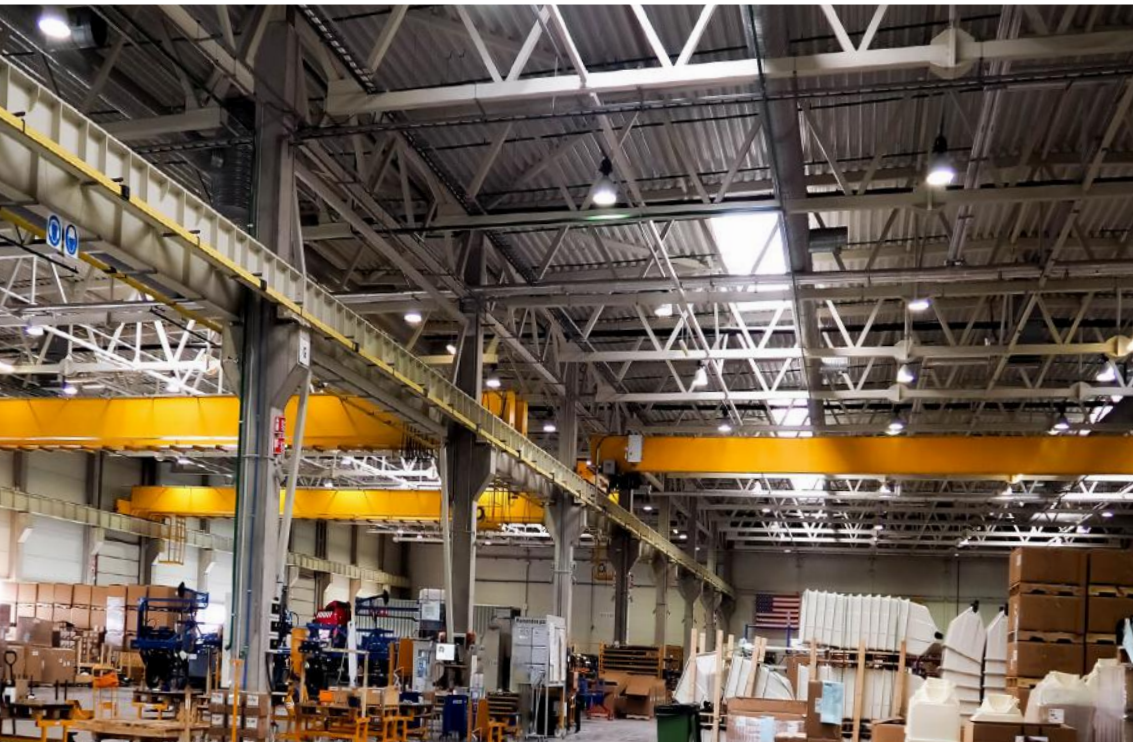

Felangi's UFO LED High Bay uses large LED Chips (SMD 2835) to achieve the highest luminous efficiency, which provides 150 lumens per watt. Moreover, the optional PIR sensor makes this light intelligent and even better for energy conservation. Enjoy features such as: Energy Efficient, Dimmability, and IP65 Protection.



FL-150W2050



FL-240W2050

HB Microwave Motion Sensor



FL-MMS-2

Remote Controller



FL-MMS-RC-2

IP65 Protection Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	UL	DLC	Dim.	Qty.
LED FIXTURES Commercial Products										* Frosted Plastic Lens			
FL-150W2050 (5000K)										*Compatible with motion sensor FL-MMS-2, Compatible with remote controller FL-MMS-RC-2 1.65 A			
150 W	120 - 277V	22500 - 21750 lm	90°	80	145 lm/W	0.9	50,000 Hrs.	11.8" x 6.4"	Yes	Yes	Yes	1	
FL-240W2050 (5000K)										*Compatible with motion sensor FL-MMS-2, Compatible with remote controller FL-MMS-RC-2 1.65 A			
240 W	120 - 277V	32400 - 34800 lm	90°	80	145 lm/W	0.9	50,000 Hrs.	14.1" x 7"	Yes	Yes	Yes	1	

*With adopted dual PD technology, the High Bay PIR Sensor is able to differentiate artificial light from natural light, once installed in the fixture. The High Bay will also automatically turn off once the ambient brightness exceeds the preset lux level.

* For using motion sensor and remote controller function on LED High bay lights, these accessories have to be ordered separately


2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial LED Wall Pack

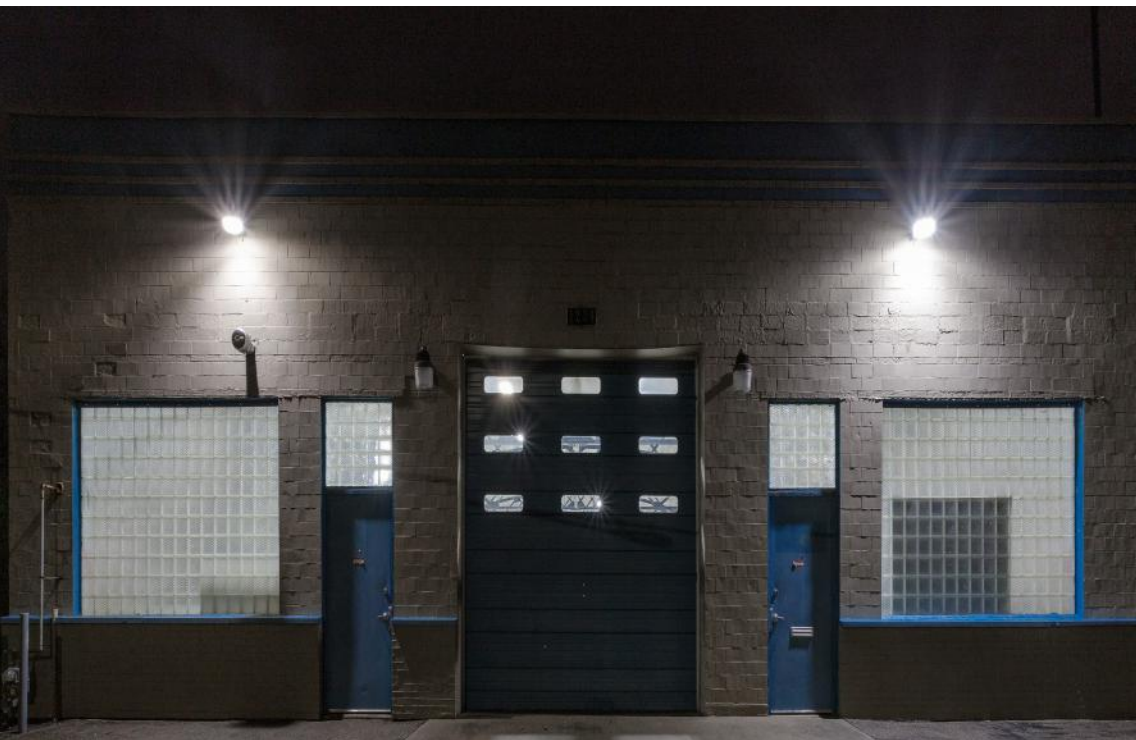

Providing safety and security, Felangi's LED Wall Pack Series performs best in outdoor commercial applications. With a strong polycarbonate lens, these LED wall packs distribute directional light without sacrificing any lumen output. For maximum energy efficiency, smart models include Dusk to Dawn technology, turning on and off with the rising and setting of the sun.



FL-1053



Mini Wall Pack

FL-WL01BLK-1030e
FL-WL02BLK-1050e
FL-WL03BLK-1230e
FL-WL04BLK-1250e



FL-80W103sw

High Power Voltage **Dusk to Dawn Sensor** **Wet Rated**

Input Power	Equal	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (W x H x L)	UL	ETL	DLC	E-star	Qty.
LED FIXTURES Commercial Products																
												* Matte Black Aluminum Die Cast Clear Plastic Lens				
FL-1053(5000K)																
70 W	400 W	120-277V	7500 lm	120°	80	107 lm/W	0.9	1 A	Wire	50,000 Hrs.	4.6" x 10.5" x 9.7"	No	Yes	Yes	No	1
FL-WL01BLK-1030e(3000K), FL-WL02BLK-1050e(5000K)																
12 W	N/A	120 V	1000 lm	116°	80	83 lm/W	0.7	0.1 A	Direct Wiring	50,000 Hrs.	5.1" x 8.4" x 2.1"	No	Yes	No	Yes	1
FL-WL03BLK-1230e(3000K), FL-WL04BLK-1250e(5000K)																
12 W	N/A	120 V	1000 lm	116°	80	83 lm/W	0.9	0.1 A	Direct Wiring	50,000 Hrs.	5.1" x 8.4" x 2.1"	No	Yes	No	Yes	1
FL-80W103sw(3000K / 4000K / 5000K) 3 CCT & 3 Wattage Selectable																
16-80 W	N/A	120-277V	10800-11600 lm	110°	80	135-145 lm/W	0.9	0.85 A	N/A	50,000 Hrs.	14 3" x 7.3" x 7.3"	Yes	No	Yes	No	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Commercial Product Accessory



Engineered to withstand deterioration agents and fit flat panels, downlight goof rings (9" / 10-15/16") and downlight mounting plates (T-grid / Stud/Joist ceilings). We work in compliance with institutions like DLC, UL, ETL, Energy Star, among others to ensure the safety and sustainability of our products. Our mounting hardware is suitable for use in offices, garages, workshops, warehouses, retail spaces, medical facilities and commercial buildings.

LED Flat Panel Surface Mount Kit




FL14-SMK
1x4ft. LED Panel Surface mount kit

LED Downlight Goof Ring & Mounting Plate




FL6C-GoofRing6"
Goof ring for extending from 8-1/4" to 10-1/2" Maximum Ceiling Cutout 9" for *FL6C-18W103swej*



FL8C-GoofRing8"
Goof ring for extending from 10-1/4" to 12-1/2" Maximum Ceiling Cutout 10-15/16" for *FL8C-22W103swej*



FL6/8C-TGridPlate
Mounting plate for new construction or remodel T-grid ceilings.

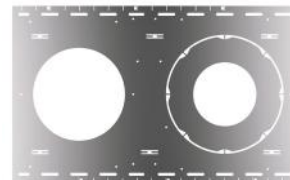

FL6/8C-Stud/JoistPlate
Mounting plate for new construction Stud/Joist ceilings

Residential Decorative Fixture



Felangi counts with multiple residential luminaries designed to enhanced your interiors and exteriors. Our selection includes advanced features such as motion-sensor, dusk-to-dawn-sensor, wet/damp rated, 90+ CRI and many others. We work in compliance with institutions like DLC, UL, ETL, T24, Energy Star, among others to ensure the safety and sustainability of our products. Our residential ranked products are suitable for use in houses, villas, apartments, hotels, and living spaces.

To learn more, we encourage you to continue exploring what Felangi has waiting for you.

Residential Decorative Fixture LED Flame Lantern & Hanging Light



A step above simple outdoor lighting, the Felangi Flame Bulb Fixture decorates, illuminates and protects. Note-worthy and inventive, the LED-integrated outdoor lantern is designed with dusk to dawn technology, motion sensor detection and an enclosed flame bulb programmed with over 300 LEDs. At sunset, the enclosed flame bulb turns on flicker motion, then when motion is detected, the fixture turns to full brightness. Aside from ensuring safety and security, the decorative lantern offers an aesthetic appeal with frosted glass, bronze finish, and a swooping S-hook arm.



Motion Sensor Dusk to Dawn Sensor Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (L x W x H)	Material	Integrated	ETL	Qty.
LED FIXTURES Lantern Class														
FL-130W-MD(3000K) *Integrated and Flame Lamp Included														
12.5 W	120 V	1200 lm	110°	80	96 lm/W	0.7	0.1 A	E12	50,000 Hrs.	8" x 9.4" x 14.5"	Bronze Finish with Frosted Glass Lens Available in Water Glass Lens	Yes	Yes	1
EFL-140W-MD(3000K) *Integrated and Flame Lamp Included														
12.5 W	120 V	1200 lm	110°	80	96 lm/W	0.7	0.1 A	E12	50,000 Hrs.	8" x 9.4" x 14.5"	White Water Glass Finish	Yes	Yes	1
FL-130W-MD(3000K) *Integrated and 3 Flame Lamp Included														
12.5 W	120 V	1300 lm	206°	80	104 lm/W	0.7	0.1 A	E12	50,000 Hrs.	6.8" x 7.9" x 12.6"	Bronze Finish with Water Glass Lens	Yes	Yes	1


2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture LED Outdoor Wall Light

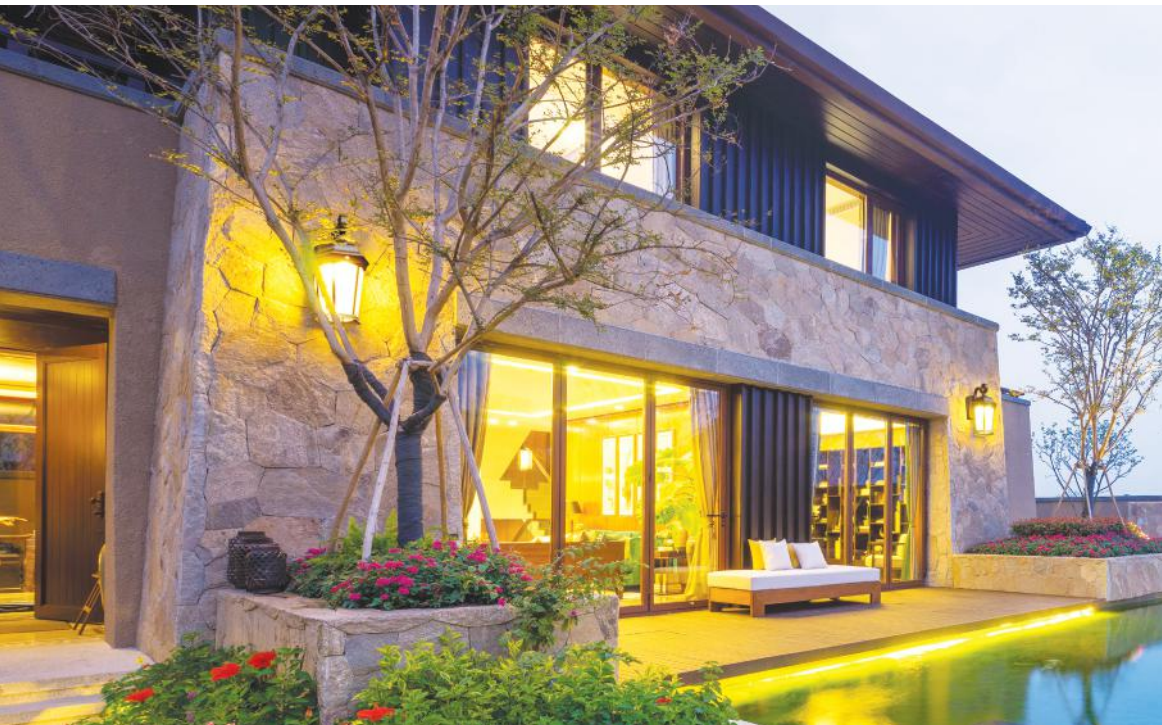

Combining contemporary and classic style, Felangi's LED Outdoor Wall Series creates a warm and relaxing ambiance for all outdoor spaces. Offered in several finishes, these LED wall fixtures decorate porches, patios, and entryways while reducing energy and maintenance costs. For maximum energy efficiency, select models include Dusk to Dawn technology, turning on and off with the rising and setting of the sun.

Bulkhead Class

■ LED FIXTURES Residential
FL-WL13BLK-2050e / FL-WL14WH-2050e

Lantern Class

■ LED FIXTURES Residential
FL-WL11BRZ-1030e / FL-WL17BRZ-1030e / FL-WL56BLK-1220cec

Half Cylinder Class

■ LED FIXTURES Residential
FL-WL10FR-2030e

Oval Class

■ LED FIXTURES Residential
FL-WL16FR-2030e

Sconce Class

■ LED FIXTURES Residential
FL-31W103SP

LED Outdoor Wall Light

Residential Decorative Fixture | Outdoor



FL-WL13BLK-2050e
FL-WL14WH-2050e

FL-WL10FR-2030e

FL-WL16FR-2030e

FL-WL11BRZ-1030e

FL-WL17BRZ-1030e

FL-WL56BLK-1220cec

FL-31W103SP

Dual Sensor Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (L x W x H)	Material	Integrated	ETL	E-star	CEC	T24	JA8	Qty.	
LED FIXTURES Residential																			
FL-WL13BLK-2050e, FL-WL14WH-2050e(5000K) White Aluminum Bezel																			
6.2 W	120 V	434 lm	125°	80	70 lm/W	0.7	0.05 A	Direct Wiring	50,000 Hrs.	5" x 4.4" x 8.5"	Matte Black Aluminum Bezel Ribbed Glass Lens Available in White Aluminum	Yes	Yes	Yes	No	No	No	1	
FL-WL10FR-2030e(3000K)																			
12.5 W	120 V	950 lm	110°	80	76 lm/W	0.7	0.1 A	Direct Wiring	50,000 Hrs.	5.9" x 3.6" x 7.8"	Brushed Nickel Trim Frosted Plastic Lens	Yes	Yes	Yes	No	No	No	1	
FL-WL16FR-2030e(3000K)																			
12.5 W	120 V	1000 lm	125°	80	80 lm/W	0.7	0.1 A	Direct Wiring	50,000 Hrs.	4.4" x 2.6" x 12"	Brushed Nickel Trim Frosted Plastic Lens	Yes	Yes	Yes	No	No	No	1	
FL-WL11BRZ-1030e(3000K)																			
11.5 W	120 V	1050 lm	110°	80	91.3 lm/W	0.7	0.09 A	Direct Wiring	50,000 Hrs.	7.5" x 10.1" x 11.9"	Bronze Finish with Frosted Glass Lens	Yes	Yes	Yes	No	No	No	1	
FL-WL17BRZ-1030e(3000K)																			
12.5 W	120 V	1200 lm	100°	80	96 lm/W	0.7	0.09 A	Direct Wiring	50,000 Hrs.	6.49" x 89" x 13.9"	Bronze Finish with Frosted Glass Lens	Yes	Yes	Yes	No	No	No	1	
FL-WL56BLK-1220cec(2700K)																			
17 W	120 V	1600 lm	150°	90	94 lm/W	0.9	0.14 A	Direct Wiring	25,000 Hrs.	4.7" x 6" x 10"	Matt Black Aluminum Housing Cast Water Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	1	
FL-31W103SP(3000K / 4000K / 5000K) 3 CCT Selectable Dual CCT Tunable																			
31 W	120 V	3000 lm	110°	80	N/A	0.7	0.324 A	Direct Wiring	50,000 Hrs.	5.6" x 3.9" x 11.8"	Matt Black Aluminum Housing Frosted PC Lens	Yes	Yes	No	No	No	No	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture LED Security Light



Felangi's security light enhances your home or business safety with its dusk to dawn and motion sensor functions while achieving energy saving solutions. At a 50,000 hour lifespan and 3000 lumen capacity, this security light provides ultimate brightness that lasts years. Flexible to your needs, adjust the timer, sensitivity range, and color temperature with a 3-in-1 color tunable switch of 3000K, 4000K & 5000K. Offered with various adjustable functions and automatic on/off sensors, Felangi's security light provides an energy efficient and maintenance free solution to the safety of your property.



FL-35W110

New Item Motion Sensor Dusk to Dawn Sensor Wet Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (W x H x D)	Material	Integrated	ETL	Qty.
LED FIXTURES Security light														
NEW FL-35W110(3000K/4000K/5000K) 3 CCT Selectable <i>*Adjustable time & sensitivity range</i>														
35 W	120 V	3000 lm	102°	80	85.7 lm/W	0.7	0.29 A	Direct Wiring	50,000 Hrs.	10" x 9.4" x 4.6"	Black Finish with Frosted PC Lens	Yes	Yes	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture LED Ceiling Light



Contemporary and sleek design, these LED flush mount ceiling lights will add a warm welcoming theme and adds a simple style to any residential or commercial space. Offered in a variety of sizes and color temperatures, Felangi's LED Indoor Ceiling Light Series provides easy installation paired with a long lifespan making these LED Fixtures energy efficient and maintenance free.

7" Round Class

■ LED FIXTURES Residential
FL-CL06WH-2030e

12" Round Class

■ LED FIXTURES Residential
FL-CL38BN-2030e

13" Round Class

■ LED FIXTURES Residential
FL-CL31CH-2030e
FL-CL45WH-2020cec / FL-CL46BN-2020cec

15" Round Class

■ LED FIXTURES Residential
FL-CL09FR-2040e / FL-CL30BN-2030e EIN-
CL32CH-2030e / FL-CL35BN-2030e

16" Round Class

■ LED FIXTURES Residential
FL-CL43SL-2030e-2

LED Ceiling Light

Residential Decorative Fixture | Indoor



Damp Rated

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan	Size (Ø x H)	Material	ETL	E-star	CEC	T24	JA8	Dim.	Qty.	
LED FIXTURES Residential																			
FL-CL06WH-2030e(3000K)																			
11.5 W	120 V	800 lm	111°	80	69 lm/W	0.7	0.09 A	Connector	50,000 Hrs.	7.4" x 1.3"	Matte White Bezel Frosted Plastic Lens	Yes	Yes	No	No	No	Yes	1	
FL-CL46BN-2020cec(2700K)																			
24 W	120 V	2200 lm	180°	90	91 lm/W	0.9	0.2 A	Connector	25,000 Hrs.	13" x 5"	Brushed Nickel Bezel Acid Etched Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	1	
FL-CL45WH-2020cec(2700K)																			
24 W	120 V	2200 lm	180°	90	91 lm/W	0.9	0.2 A	Connector	25,000 Hrs.	13" x 5"	Matte White Bezel Acid Etched Glass Len	Yes	Yes	Yes	Yes	Yes	Yes	1	
FL-CL38BN-2030e(3000K)																			
19 W	120 V	1500 lm	180°	80	78 lm/W	0.9	0.16 A	Connector	47,000 Hrs.	12.2" x 3.6"	Brushed Nickel Bezel Alabaster Glass Lens	Yes	Yes	No	No	No	Yes	1	
FL-CL09FR-2040e(4000K)																			
27.5 W	120 V	1925 lm	115°	80	70 lm/W	0.7	0.2 A	Connector	50,000 Hrs.	14.9" x 3.1"	Brushed Nickel Double Rings Frosted Plastic Lens	Yes	Yes	No	No	No	Yes	1	
FL-CL35BN-2030e(3000K)																			
19 W	120 V	1500 lm	180°	80	78 lm/W	0.9	0.16 A	Connector	49,000 Hrs.	15.7" x 5"	Brushed Nickel Bezel Alabaster Glass Lens	Yes	Yes	No	No	No	Yes	1	
FL-CL43SL-2030e-2(3000K)																			
19 W	120 V	1500 lm	180°	80	78 lm/W	0.9	0.16 A	Connector	47,000 Hrs.	15.3" x 3.5"	Silver Bezel Frosted Plastic Lens	Yes	Yes	No	No	No	Yes	2	
FL-CL31CH-2030e(3000K)																			
19 W	120 V	1500 lm	180°	80	78 lm/W	0.9	0.16 A	Connector	47,000 Hrs.	12.9" x 5.9"	Chrome Bezel Frosted Glass Lens	Yes	Yes	No	No	No	Yes	1	
FL-CL32CH-2030e(3000K)																			
25 W	120 V	2200 lm	180°	80	88 lm/W	0.9	0.21 A	Connector	49,000 Hrs.	14.9" x 4.6"	Chrome Bezel Frosted Glass Lens	Yes	Yes	No	No	No	Yes	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture LED Vanity Light



Designed to beautifully illuminate any bath or living space, Felangi's LED vanities are crafted for versatility and energy efficiency. With high lumen outputs, these decorative LED fixtures ensure brightness and clarity for 35000 hours. Available in pleasing Soft White (3000K), these fully-integrated LED vanities effortlessly combine classic with contemporary style. Dimmable and Energy Star certified each Felangi LED vanity guarantees your home a lighting upgrade.



FL-VL19FR-1030e



FL-VL20SL-1030e



FL-VL48WH-1020cec



FL-VL49BN-1020cec

Damp Rated True Color

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (L x W x H)	Material	Integrated	UL	E-star	CEC	T24	JA8	Dim.	Qty.	
LED FIXTURES Residential																			
FL-VL19FR-1030e(3000K)																			
28 W	120 V	2100 lm	110°	80	75 lm/W	0.7	0.25 A	35,000 Hrs.	23.7" x 4" x 5.9"	Matte White Bezel Frosted Plastic Lens	Yes	Yes	Yes	No	No	No	Yes	1	
FL-VL20SL-1030e(3000K)																			
28 W	120 V	2000 lm	87°	80	71 lm/W	0.7	0.25 A	35,000 Hrs.	24" x 7.7" x 7.4"	Brushed Nickel Bezel Acid Etched Glass Lens	Yes	Yes	Yes	No	No	No	Yes	1	
FL-VL48WH-1020cec(2700K)																			
27 W	120 V	2430 lm	180°	90	71 lm/W	0.9	0.24 A	25,000 Hrs.	24" x 8" x 7"	White Housing with Acidified Glass Bells	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1	
FL-VL49BN-1020cec(2700K)																			
27 W	120 V	2430 lm	180°	90	71 lm/W	0.9	0.24 A	25,000 Hrs.	24" x 8" x 7"	Brushed Nickel Bezel Acid with Acidified Glass Bells	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1	

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture

LED Wall Sconce



Combining contemporary with classic style, this Felangi decorative wall light features clean, White housing and an acid-etched, ribbed glass bowl. Only 9 Watts and dimmable, this LED wall sconce light guarantees a long lifespan and unbeatable illumination in Warm White (2700K).



FL-WL50BN-1020cec



FL-WL51WH-1020cec

Damp Rated True Color

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Lamp Lifespan	Size (L x W x H)	Material	Integrated	UL	E-star	CEC	T24	JA8	Dim.	Qty.
LED FIXTURES Residential																	
FL-WL50WH-1020cec(2700K)																	
9 W	120 V	810 lm	180°	90	90 lm/W	0.9	25,000 Hrs.	11" x 5.5" x 4.7"	Brushed Nickel Bezel & Acid-Etched Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1
FL-WL51WH-1020cec(2700K)																	
9 W	120 V	810 lm	180°	90	90 lm/W	0.9	25,000 Hrs.	11" x 5.5" x 4.7"	White Housing with Acid-Etched Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1

2700K Warm White

3000K Soft White

4000K Bright White

5000K Cool White

Residential Decorative Fixture LED Torchiere Lamp



With a minimalist and a chic design this Felangi LED torchiere lamp is a great addition to any home exterior. The neutral color and simplistic design of this lamp allows it to easily pair with any given space. Only 24 Watts and dimmable, this LED torchiere lamp guarantees a long lifespan and unbeatable illumination in Warm White (2700K).



FL-TL53BLK-1020cec



FL-TL55BN-1020cec

Damp Rated True Color

Input Power	Input Voltage	Lumen Output	Beam Angle	CRI	Luminous Efficacy	Power Factor	Input Current	Lamp Lifespan	Size (W x H)	Material	Integrated	UL	E-star	CEC	T24	JA8	Dim.	Qty.	
LED FIXTURES Residential																			
FL-TL53BLK-1020cec(2700K)																			
24 W	120 V	2200 lm	180°	90	91 lm/W	0.9	0.2 A	25,000 Hrs.	11" x 69"	Matte Black Steel with Acidified Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1	
FL-TL55BN-1020cec(2700K)																			
24 W	120 V	2200 lm	180°	90	91 lm/W	0.9	0.2 A	25,000 Hrs.	11" x 69"	Brushed Nickel Steel with Acidified Glass Lens	Yes	Yes	Yes	Yes	Yes	Yes	Yes	1	

2700K Warm White 3000K Soft White 4000K Bright White 5000K Cool White

